




WAS-6 Series Quick-Mount Wall Loudspeaker

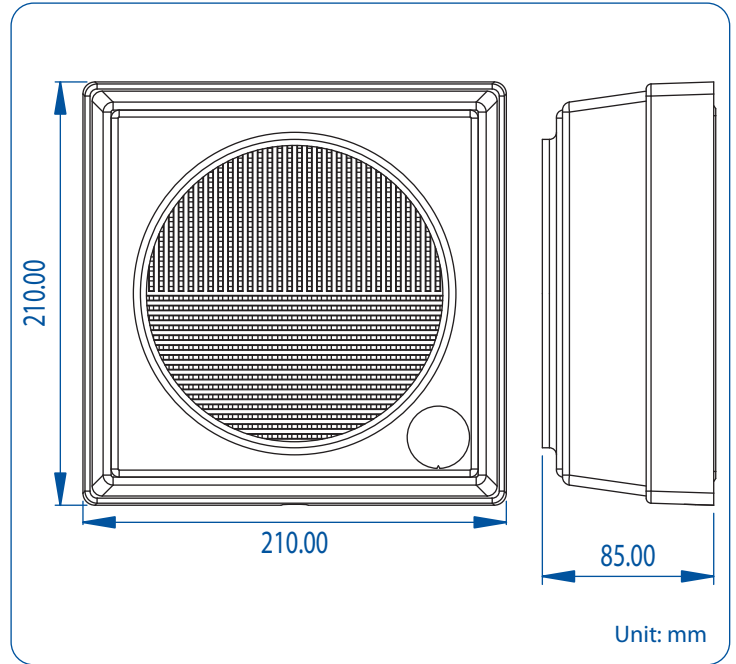

- 100 Hours Life Tested
- CE Certified (EMC & LVD)
- IP Rated
- Rustproof
- UL94V0
- BS 5839 Part 8
- EASE Data
- RoHS Compliance
- UV Protected
- Withstanding/Insulation Tested

- Available in 3 options:
 - WAS-6061
 - WAS-6061V with volume control
 - WAS-6061VP with volume control and priority override
- Secure fix system (using hex. socket screw).
- Fast installation of face plate.
- Rugged ABS with self-extinguishing UL94V0 cabinet.
- 6 watt 100 & 70 volt line.
- Ideal for background music as well as public address announcements.
- Standard colour is white (RAL 9016).

Model No.	WAS-6061	WAS-6061V	WAS-6061VP
Rated Power (rms)		6W	
Impedance		1.67kΩ, 3.33kΩ, 6.67kΩ, & 13.33kΩ	
Power Taps @ 100V		6W, 3W, 1.5W & 0.75W	
Power Taps @ 70V		3W, 1.5W, 0.75W & 0.375W	
SPL (1W / 1M)		95 dB	
Max. SPL (Rated 6W / 1M)		102 dB	
Frequency Range (-10dB)		160 Hz ~ 20K Hz	
Dispersion 1K Hz / 4K Hz		180° / 90°	
Ambient Temperature		-30°C ~ +60°C	
Power Selection		Plug	Quick Connector
Volume Control	N. A.	Available	Available
Priority	N. A.	N. A.	Available
Backplate		Standard	
Material		Housing: UL94V0 high impact ABS, Backplate: Aluminium	
Colour / Finish		White (RAL 9016)	
Dimensions		210 (8.27) X 210 (8.27) X 85 (3.35) mm. (in.)	
Net Weight (ea)		1.3 kgs (2.87 lbs)	
Mounting		Screws and Key-hole	