






## **MD-60(T)**

Commercial Audio Solutions Ltd The Old Barn, Whitecroft Farm Strines, Derbyshire. SK22 3AH. Tel: 01663 767888

www.commercialaudiosolutions.com








| Secondary |          |  |
|-----------|----------|--|
| switch    | tappings |  |
| 1/1       | 60,0 W   |  |
| 1/2       | 30,0 W   |  |
| 1 / 4     | 15,0 W   |  |
| 1/8       | 7,5 W    |  |
| 1 / 16    | 3,5 W    |  |

MD-60T is delivered with standard steel bracket as shown on the drawing, termination lid, gasket, cable glands, screws and one screw for fastening of bracket to cabinet.

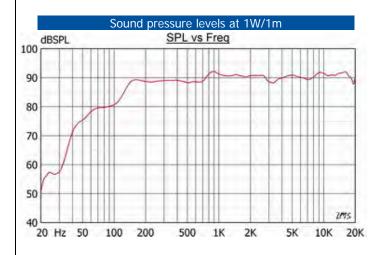

| Specifications                |                            |
|-------------------------------|----------------------------|
| Material / Color              | ABS / Black or white       |
| Mounting                      | Bracket                    |
| Termination                   | Screw terminal             |
| Weight w/transformer          | 3,9 kg                     |
| IP-rating                     | 44*                        |
| Max. / min. amb. temp         | 90°C / -20°C               |
| Rated / max. power            | 60 W / 100 W               |
| SPL 1W/1m                     | 90 dB                      |
| SPL rated power               | 109 dB                     |
| Effective freq. range         | 45 – 20000 Hz              |
| Dispersion (-6dB) 1kHz / 4kHz | 140° / 65° vertical        |
| Options                       | Impedances, colors, labels |

## Installation, Operation and Maintenance Procedures

- MD-60 is available with 60W transformer, and optional brackets are available on request.
- Screw bracket to wall or ceiling, place cabinet onto ball socket and tighten bolt.
- Connect to screw terminal and select required volume with the switch.
- Screw on lid with gasket and tighten cable glands to assure a good sealing towards cable.
- For optimum performance, always use the correct voltage / power and operate within the frequency limits as stated.
- Do <u>not</u> open loudspeaker when energized.
- This loudspeaker is supplied with a 2 year warranty against defective workmanship.
  - \* To achieve IP 44 the loudspeaker should be mounted with the grill 30 degrees downwards.