





DNH


ISO 9001 CERTIFIED

MD-40(T)

Commercial Audio Solutions Ltd
The Old Barn, Whitecroft Farm
Strines, Derbyshire. SK22 3AH.
Tel: 01663 767888
www.commercialaudiosolutions.com

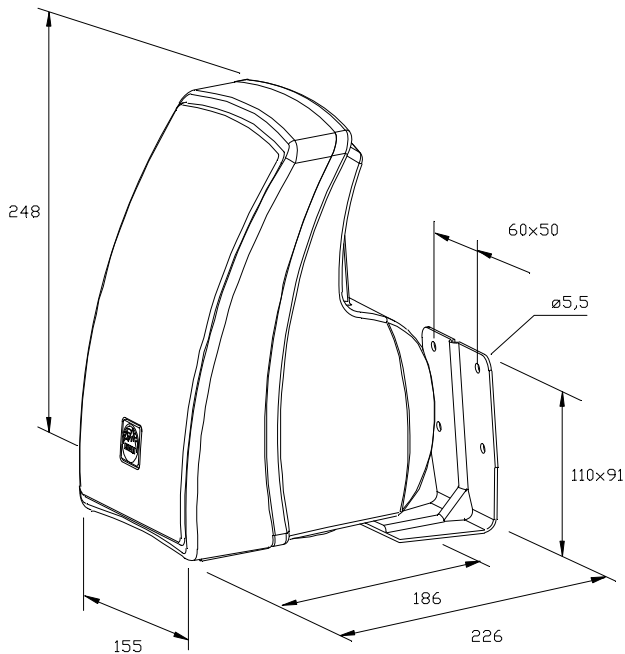


Optional
DP bracket plastic



Standard bracket

MD-40 is delivered with standard
bracket, backlid, cable glands
and screws.
Kabel dia 4-7,5mm - PG7.



Secondary switch tappings	
1 / 1	40,0 W
1 / 2	20,0 W
1 / 4	10,0 W

Sound pressure levels at 1W/1m

SPL vs Freq



Specifications

Material / Color	ABS / Black or white
Mounting	Bracket
Termination	Screw terminal
Weight w/transformer	3,1 kg
IP-rating	44*
Max. / min. amb. temp	90°C / -40°C
Rated / max. power	40 W / 60 W
SPL 1W/1m	87 dB
SPL rated power	103 dB
Effective freq. range	70 – 20000 Hz
Dispersion (-6dB) 1kHz / 4kHz	170° / 70°(Vertical)
Options	Impedances, colors, labels

Installation, Operation and Maintenance Procedures

- MD-40 is available with 40W transformer, and optional brackets are available on request.
- Screw bracket to wall or ceiling, place cabinet onto ball socket and tighten bolt.
- Connect to screw terminal and select required volume with the switch.
- Screw on lid with gasket and tighten cable glands to assure a good sealing towards cable.
- For optimum performance, always use the correct voltage / power and operate within the frequency limits as stated.
- Do not open loudspeaker when energized.
- This loudspeaker is supplied with a 2-year warranty against defective workmanship.
 - * To achieve IP the loudspeaker should be mounted with the grill 30 degrees downwards.

DNH reserves the right to alter specifications without notice

