


Key Features

- ▶ Everything you need to create a high-quality fixed hearing loop system for a counter, desktop or ticket booth.
- ▶ Ideal for banks, post offices, reception desks, ticket offices and any other area requiring restricted person to person coverage.
- ▶ PDA103 amplifier includes a 3.5mm microphone input (for use with the AMT microphone supplied), a line level input and an 'outreach' socket
- ▶ Metal compensation control helps improve intelligibility in rooms with high metal content.
- ▶ Adjustable mic, line level and 'outreach' controls.
- ▶ Drive (level) control allows the amplifier's output stage to be set-up to suit the exact characteristics of the application.
- ▶ State-of-the-art audio processor features an automatic gain control which compensates for poor microphone techniques and helps suppress loud noises, hisses & clicks.
- ▶ Can be wall-mounted using the keyholes provided.
- ▶ Exceeds the requirements of PD IEC TR 63079 & EN60118-4 when correctly installed.

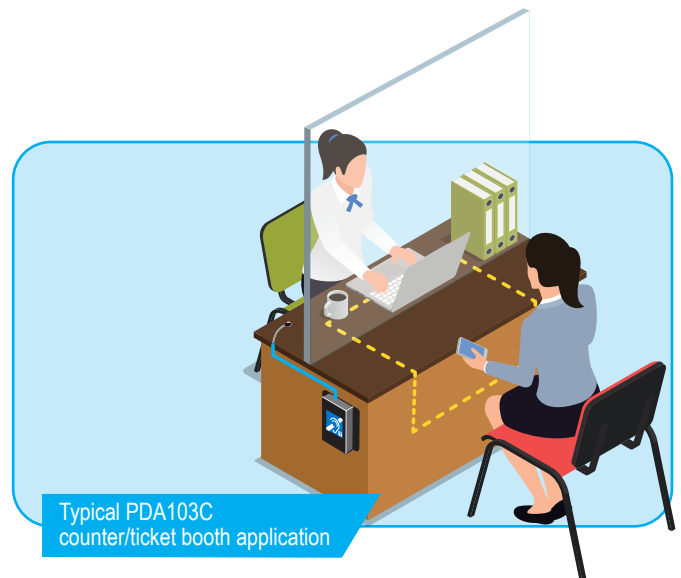

At-a-glance specifications

| | |
|----------------------------------|--|
| TYPE | Small Volume (A2). Free-standing/wall mountable. Plugtop mains lead supplied |
| COVERAGE | 1.2m ² approx. |
| DIMENSIONS & WEIGHT | W 135 x H 130 x D 35mm / 380g (amplifier only); W 340 x H 250 x D 73mm (kit box). |
| CONSTRUCTION & FINISH | Black metal, IP40. |
| INPUTS | 1 x 3.5mm remote mic. socket; 1 x 3.5mm line socket; 1 x Outreach socket |
| INDICATORS | Limit, Peak, Loop Fault and Power On |
| CONTROLS | Mic; Line; Outreach; Metal Compensation (all individually adjustable) and Loop Drive (Level) |
| KIT CONTENTS | PDA103 amplifier; PL1/PSU1 plugtop power supply; AMT microphone; TX2 pre-formed counter loop; 'Hearing Loop Fitted' sticker. |