


PDA103i

1.2m² Refuge/Intercom Hearing Loop System

Key Features

- ▶ A self-contained hearing loop system specifically designed to easily integrate with disabled refuge, door entry and intercom help points.
- ▶ Helps satisfy the integrated loop requirements of BS 8300
- ▶ Housed in an attractive surface-mounting waterproof enclosure that is ideal for use in indoor or outdoor areas.
- ▶ Supplied with a plugtop power supply (if no plug socket is available, replace with an appropriate 110-240Vac @ 50/60Hz Mains power supply)
- ▶ Adjustable controls allow the amplifier's input and output stages to be set to suit the exact characteristics of the application.
- ▶ State-of-the-art audio processor helps suppress loud noises, hisses & clicks
- ▶ Includes internal Limit, Peak, Loop Fault and Power On indicators
- ▶ Exceeds the requirements of PD IEC TR 63079 & EN60118-4 when correctly installed.

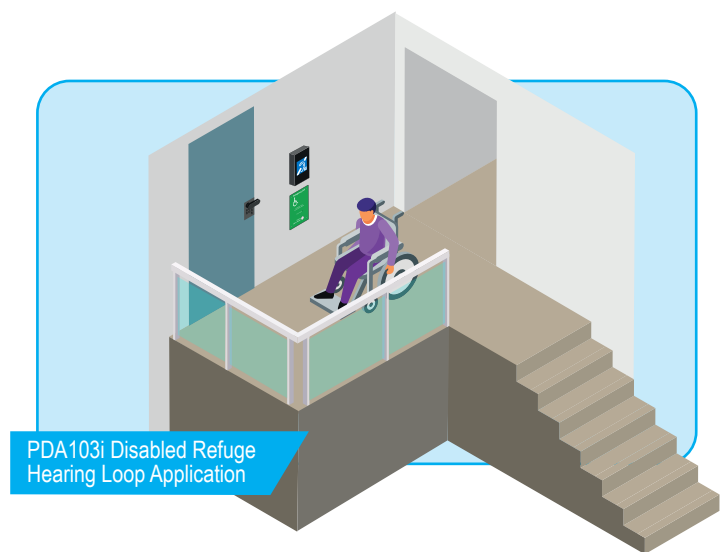

At-a-glance specifications

| | |
|----------------------------------|---|
| TYPE | Small Volume (A2). Wall mountable. Plugtop mains lead supplied |
| COVERAGE | 1.2m ² approx.. |
| DIMENSIONS & WEIGHT | W 220 x H 290 x D 100mm / 800g (amplifier) |
| CONSTRUCTION & FINISH | Black plastic, IP65 |
| INPUTS | 1 x 3.5mm remote mic. socket; 1 x 3.5mm line socket; 1 x Outreach socket |
| INDICATORS (INTERNAL) | Limit; Peak; Loop Fault; Power On. |
| CONTROLS (INTERNAL) | Mic; Line; Outreach; Metal Compensation (all individually adjustable) and Loop Drive (Level). |