



# TS-D1100 Series

Digital Conference System



Connect Remote  
Participants via **USB**

# High-Quality Sound with Elegant Design

**TS-D1100 series** is a new generation **stand-alone conference system** with elegant design and high quality sound. Various functions are provided to facilitate smooth meetings.

Up to 246 conference units can easily be connected via CAT5 cable in a simple daisy chain configuration. The **built-in feedback suppression** ensures clear communication.

Choose the accessory to your requirements:  
Select between different microphone lengths,

extend your connection lines using **extension units**, and **expand** your number of conference units **via up to 5 sub control units**.

The **operation surface comprises only of essential buttons**. This allows users to focus on the speaker. The whole design is made to be extremely unobtrusive, thus not creating a visual distraction for participants.



# Master Control Unit

## TS-D1100-MU

### OPERATION MODE

Choose from multiple operation modes to match your meeting style - including delegate unit priority control, voice-activated microphone start, or chairman-only presentation mode - all with clear audio delivered via built-in speakers.




### BUILT-IN AUDIO RECORDING

Meetings can be recorded in mp3 format on USB drive or internal memory (recording up to 18 hours).

# Hybrid Conference, Easy Setup

## USB-CONNECT

The direct USB connection to a PC enables audio input and output during web meetings and conferences.

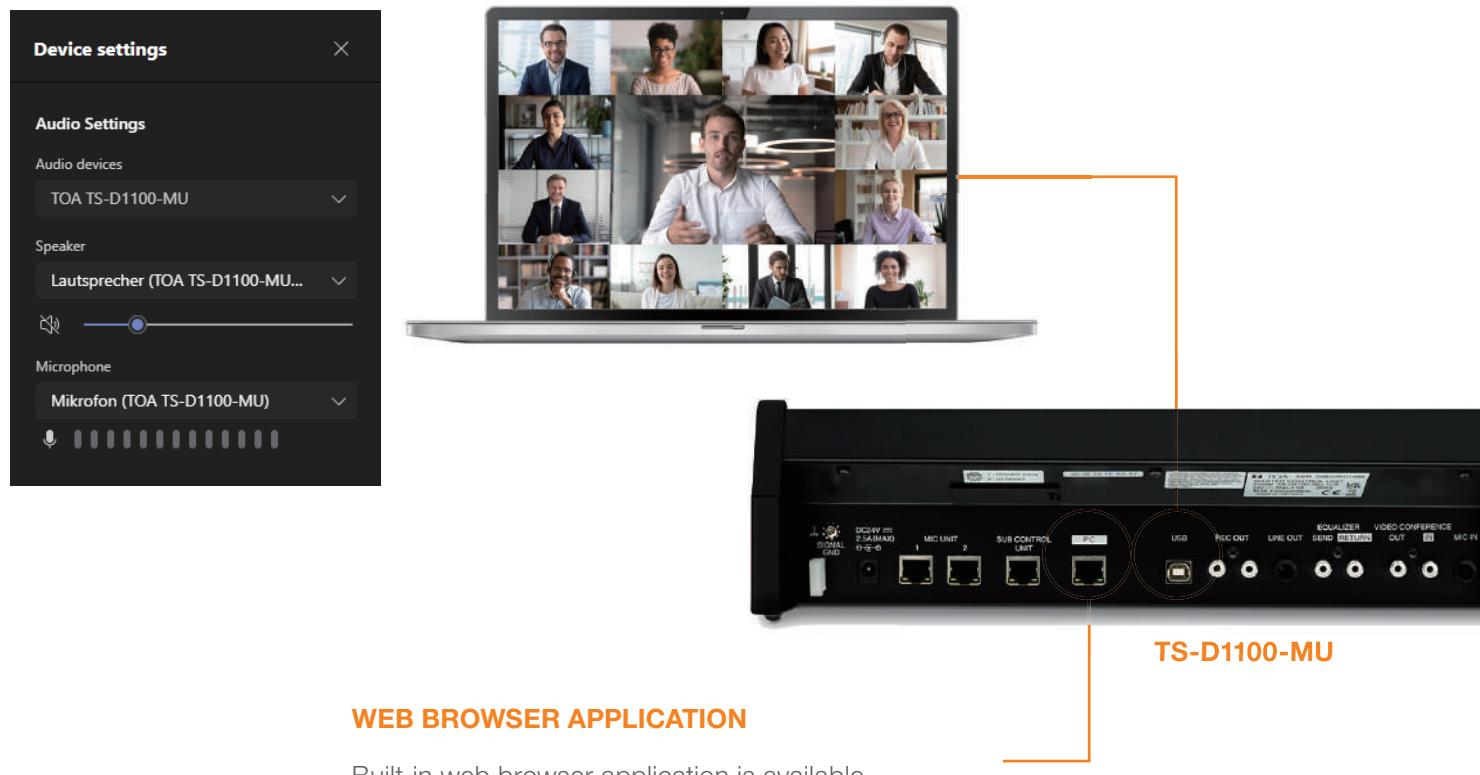

## WEB BROWSER APPLICATION



Built-in web browser application is available.  
Advanced settings can be made from a PC or tablet.

## Key Features

- ▶ **Master control unit:** For setup and administration of conferences via multiple operation modes, optionally supported by a web browser
- ▶ **Microphone units** with or without built-in speaker
- ▶ **Chairman unit with priority speech function**
- ▶ Dedicated **speaker unit** to cover a radius of approx. 3 m
- ▶ Option to **automatically deactivate inactive microphones** after 30 seconds
- ▶ **Voice activation:** Start talking instead of pressing a button
- ▶ Individual **volume control** for **speaker** and **headphone volume**
- ▶ **Recording function** using internal 1 GB memory or USB memory up to 32 GB
- ▶ **Built-in 7-point automatic feedback suppressor** ensures clear and secure conference audio

## System Configuration



MAX 246 CONFERENCE UNITS

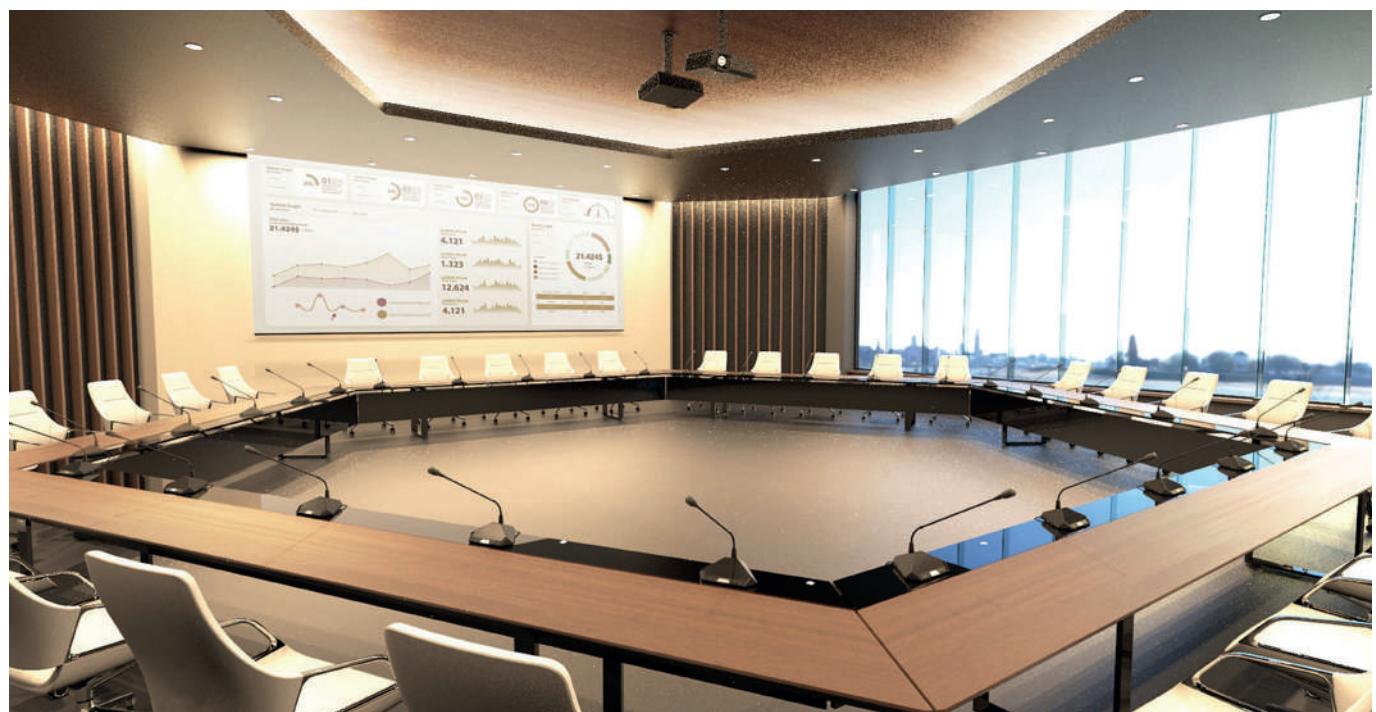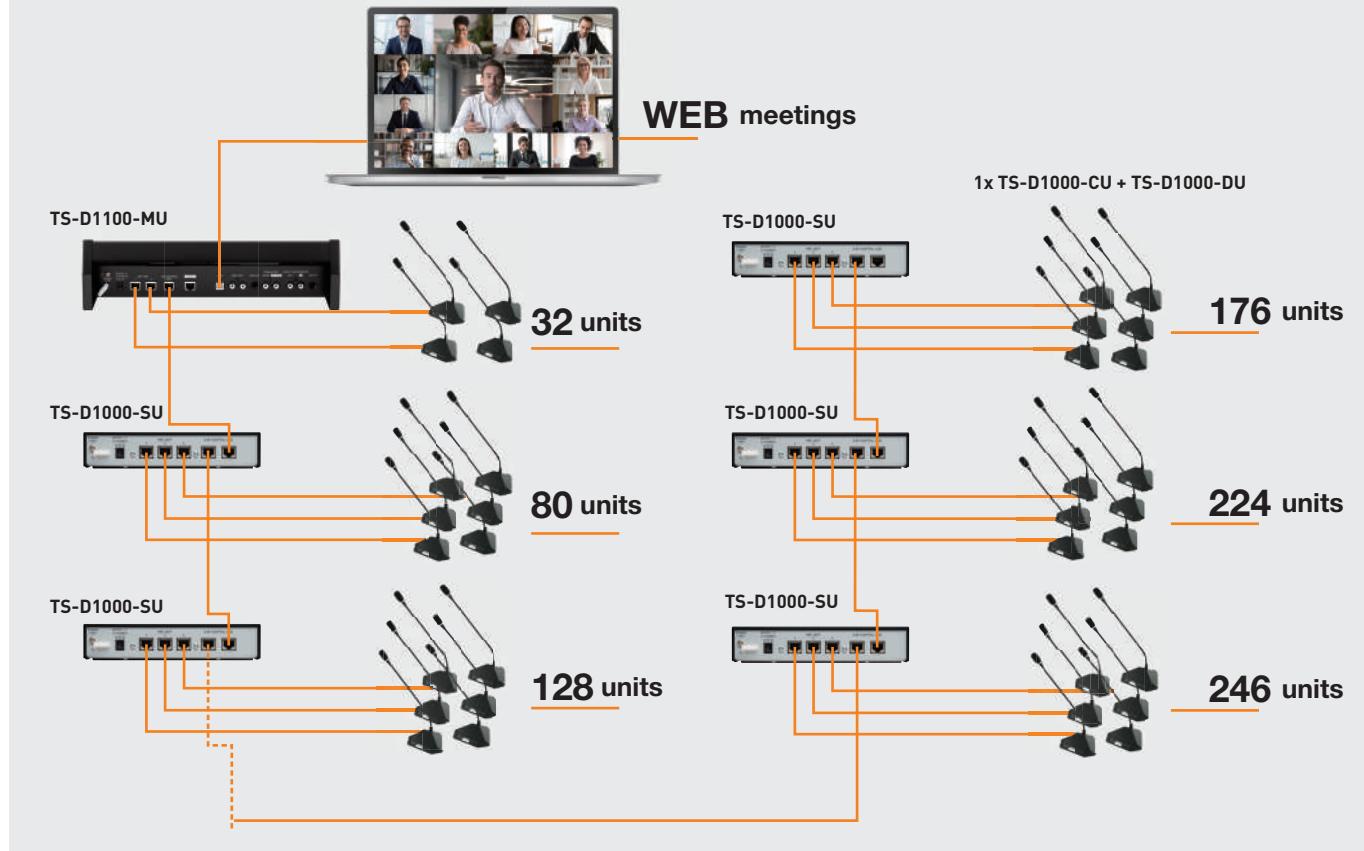+  
REMOTE WEB MEETINGS

## Space-Saving System Configuration

### TS-D1100MC & SP

To build a more **space-efficient conference system**, we offer compact microphone units combined with a single speaker unit capable of covering a 3-meter radius within the conference room.

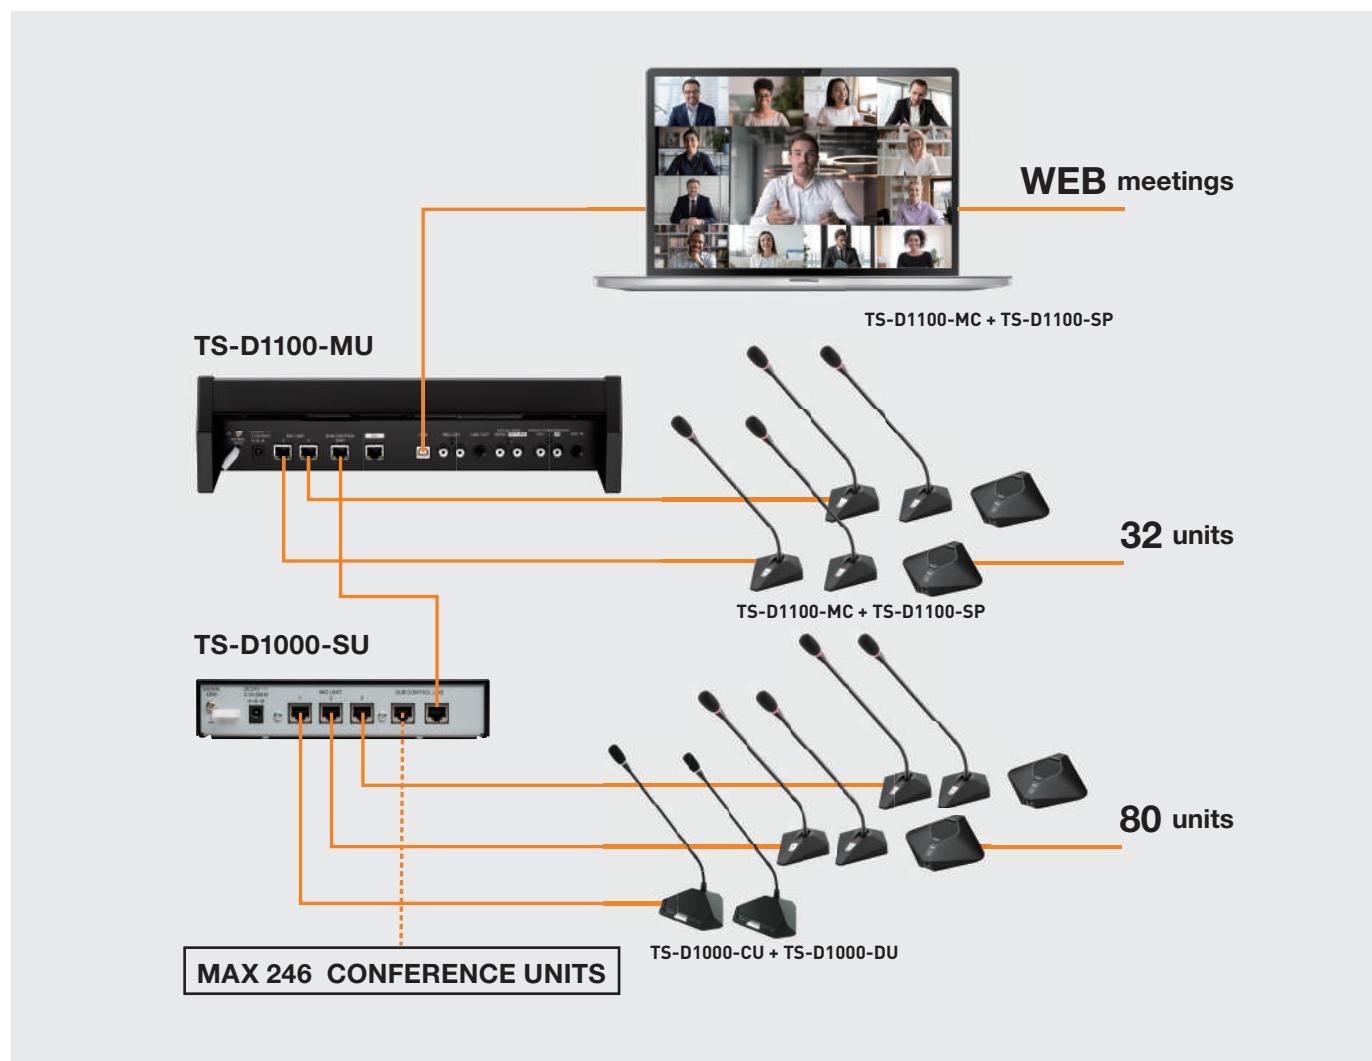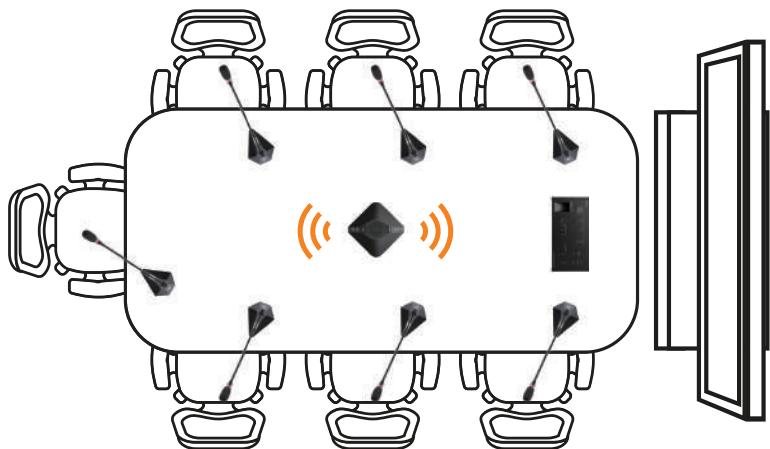

# SYSTEM COMPONENTS

# TS-D1100 SERIES

## TS-D1100-MU

Master Control Unit



- Up to 246 conference units controllable
- 2 x Mic In (Main/Sub), 3 x AUX In (Main/Sub/Main and Sub), Line Out, Rec Out, Headphone monitor out, EQ in/out
- Up to 8 open microphones, auto mic-off function, speech priority selector/feedback suppressor

- Recording function using internal 1 GB memory (approx. 18hours@128kbps) or USB memory up to 32GB
- Rack-mountable with MB-TS920 optional bracket
- Control and conference mode setting by browser via PC/tablet
- Included USB audio interface

## TS-D1000-CU

Chairman Unit



- Priority button
- 0.4 W monitor speaker
- 2 headphone jacks with individual volume control
- To be equipped with TS-D1000-M1 or TS-D1000-M2
- Daisy chain port for additional conference units

## TS-D1000-DU

Delegate Unit



- 0.4 W monitor speaker
- 2 headphone jacks with individual volume control
- To be equipped with TS-D1000-M1 or TS-D1000-M2
- Daisy chain port for additional conference units

## TS-D1100-MC

Microphone Unit



- Gooseneck microphone
- Discreet design
- LED indicator for microphone status
- Daisy chain port for additional conference units

## TS-D1000-M1

Gooseneck Microphone (standard)



- Flexible gooseneck
- Unidirectional electret condenser microphone
- Illuminated red ring indicates active microphone status
- Length: 518 mm (1.7 ft)

## TS-D1000-M2

Gooseneck Microphone (long)



- Flexible gooseneck
- Unidirectional electret condenser microphone
- Illuminated red ring indicates active microphone status
- Length: 668 mm (2.19 ft)

## TS-D1100-SP

Speaker Unit



- 1 W speaker to address multiple people at once
- Covers a radius of approx. 3 m (9.8ft)
- Discreet design
- Control keys and LED indicators for speaker volume
- Daisy chain port for additional conference units

## TS-D1000-SU

Sub control Unit



- Connects up to 48 conference units
- Up to 5 sub control units can be connected to the master control unit

## TS-D1000-EX

Extension Unit



- Allows extension of cable distance to up to 50 m (164.04 ft) between master / sub control units and chairman / delegate units
- External power supply is included
- 2x conference unit line connector

## MB-TS920

Rack Mounting Bracket



- Designed for use with TS-D1100-MU and others



**We supply sound, not equipment.**

[www.toa.eu](http://www.toa.eu)



**TOA Electronics Europe GmbH**

[www.toa.eu](http://www.toa.eu)

Specifications are subject to change without notice. 06/2025