



ADAM HALL 19" RACK COMPONENTS – CONFIGURE YOUR CUSTOM RACK

Featuring cradles, drawers and trays the Adam Hall line of 19" components provides numerous options for custom rack configuration. Blanking panels, ventilation panels and pre-punched connector panels extend functionality and structural stability while our rack lights add illumination. Mounting is made easy with our selection of cage nuts, screws and washers.

19" EQUIPMENT

MOUNTING PARTS	80
19" PANELS	81-83
CRADLES & HOUSINGS	84
19" DRAWERS	85-86
MISCELLANEOUS	87
RACK LIGHTS	88-89

MOUNTING PARTS

592#### RACK MOUNTING KIT

M6 x 12 screws, nuts and cupwashers.
For two 19"-units in a blisterpack.

▪ Weight: 0.07 kg

Art. No. **Type**

5924BLP Hexnuts

5925BLP Square nuts

565# CAGENUTS M6

Art. No. **t**

5650 3.5 mm

5651 1.5 mm

5652 3.0 mm

5653 2.0 mm

541# SCREWS

Art. No. **Type**

5417(BLK) M6 x 12

5410(BLK) M6 x 16

5416(BLK) M6 x 20

5414(BLK) M6 x 40

5420BLK M3 x 10 with nut

566# RACK NUTS M6

Art. No. **Type**

5666 Hexnut

5660 Square nut

5620 CUPWASHER FOR M6 SCREW

- Recessed
- Black plastic
- External diameter: 15 mm
- Hole size: 6.8 mm
- Height: 4.1 mm

5621 FLAT WASHER FOR M6 SCREW

- Black plastic
- External diameter: 12 mm
- Internal diameter: 6.5 mm
- Thickness: 1.6 mm



5635 HUMFREES UNIVERSAL SYSTEM

HUM & NOISE IN RACK SYSTEMS ...

Usual mounting of 19" equipment in a rack system results in contact between the devices through the rack rails. This creates ground loops – the most common cause of hum and noise.

The unique Humfrees mounting system interrupts these groundloops by isolating the 19" units from the rails and from each other. Scarring and scratching of the front panel by the mounting screws is also eliminated.

Set for one unit.
▪ Weight: 0.03 kg




19" PANELS



872215 19" U-SHAPED RACK PANEL 12 SOCKETS 1U WITH TIE BAR

1 U rack panel with punched holes for 12 universal „D“ type XLR sockets. Integrated tie bar including 12 cable ties.

- 1.5 mm steel, black powder coated
- Weight 0.38 kg

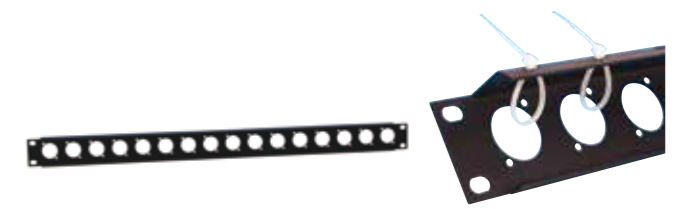

872225 19" U-SHAPED RACK PANEL 16 SOCKETS 1U WITH TIE BAR

1 U rack panel with punched holes for 16 universal „D“ type XLR sockets. Integrated tie bar including 16 cable ties.


- 1.5 mm steel, black powder coated
- Weight 0.38 kg



872213 19" U-SHAPED RACK PANEL 12 SOCKETS 1U

1 U rack panel with punched holes for 12 universal „D“ type XLR sockets. 2 mm steel, black powder coated,

- Weight 0.25 kg



872214 19" U-SHAPED RACK PANEL 24 SOCKETS 2U

2 U rack panel with punched holes for 24 universal „D“ type XLR sockets. 2 mm steel, black powder coated.


- Weight 0.40 kg



872212 19" U-SHAPED RACK PANEL UNIVERSAL 1U

1 U rack panel with punched holes for 2 x female XLR, 6 x male XLR and 1 x IECC mains socket. Steel, black powder coated

- Weight 0.28 kg

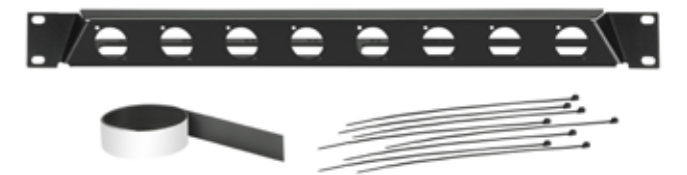

872230 19" ANGLED RACK PANEL FOR 8 X D-TYPE SOCKETS

The mounting holes are fitted with M3 threads; the tilt angle is 30°. The front overhead surface is intended for labels - a magnetic labelling strip is included.


- Thickness: 2 mm
- In Addition: Incl. magnetic labelling strip, 8 x cable ties

19" PANELS



7839 BLANKING PLATE

Universal XLR blanking plate for „D“-type cutouts, black plastic.

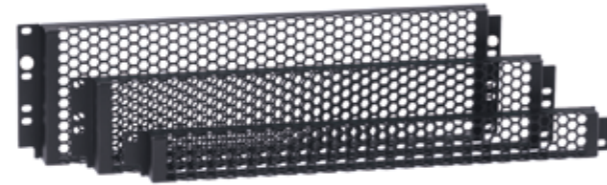

8744# 19" COVER WITH PUNCHED HOLE FRONT, COARSE

For protecting settings on effects units, etc. Black powder coated.

- Inside depth 25 mm

Art. No.	U	Weight
87445	1	0.32 kg
87446	2	0.13 kg
87447	3	0.53 kg



8744#VR 19" COVER WITH PUNCHED HOLE FRONT, FINE

For protecting settings on effects units, etc. Black powder coated.

- Inside depth 28 mm

Art. No.	U	Weight
87446VR	2	0.41 kg
87447VR	3	0.60 kg



8744# 19" COVER WITH PLEXIGLASS FRONT

For protecting settings on effects units, etc.

- Inside depth 28 mm

Art. No.	U	Weight
87441	1	0.33 kg
87442	2	0.41 kg



87221V 19" U-SHAPED VENTILATION PANEL 1U WITH VERTICAL SLOTS

- 1 U, with vertical slots
- Ventilation area 30 cm²
- 1.5 mm Steel, black powder coated
- Weight 0.29 kg



8722#VR 19" U-SHAPED VENTILATION PANEL WITH ROUND HOLES

- U-Shaped Ventilation Panel with round holes
- 1.5 mm Steel, black powder coated

Art. No.	U	Ventilation area	Weight
87221VR	1	88 cm ²	0.25 kg
87222VR	2	210 cm ²	0.36 kg
87223VR	3	320 cm ²	0.47 kg



8722#VH 19" U-SHAPED VENTILATION PANEL WITH HORIZONTAL SLOTS

- U-Shaped Ventilation Panel with horizontal slots
- 1.5 mm Steel, black powder coated


Art. No.	U	Ventilation area	Weight
87221VH	1	38 cm ²	0.28 kg
87222VH	2	89 cm ²	0.57 kg



872# 19" FLAT RACK PANEL ALUMINIUM

- 3 mm Aluminium or 1.5 mm Steel, black powder coated

Art. No.	U	Weight
8721(STL)	1	0.18 (0.34) kg
8722(STL)	2	0.36 (0.67) kg
8723(STL)	3	0.54 (1.04) kg
8724(STL)	4	0.72 (1.33) kg

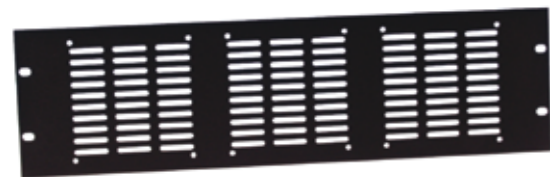

876# 19" RACK PANEL FOR AXIAL FANS

3 U high for mounting up to 3 axial fans.

- 1.5 mm steel black powder coated

Art. No.	Fans	Weight
8763	2	0.84 kg
8764	1	0.90 kg
8765	3	0.82 kg



8721V 19" FLAT VENTILATION PANEL 1U WITH VERTICAL SLOTS

- 1 U, with vertical slots.
- Ventilation area 30 cm²
- 1.5 mm Steel, black powder coated
- Weight 0.28 kg



8722# 19" U-SHAPED RACK PANEL ALUMINIUM

- 2 mm aluminium or 1.5 mm steel, black powder coated

Art. No.	U	Weight
872205STL	1/2	0.17 kg
87221(STL)	1	0.20 (0.32) kg
87222(STL)	2	0.35 (0.58) kg
87223(STL)	3	0.40 (0.80) kg
87224(STL)	4	0.54 (1.06) kg

19" PANELS

CRADLES & HOUSINGS



875# 19" RACK CRADLE

For mounting of non 19" equipment. The extensive mounting hole pattern in the base greatly reduces the need for drilling.

- 1.5 mm Steel, black powder coated
- Depth 250 mm

Art. No.	U	Weight
8754	1	2.00 kg
8755	2	4.00 kg



8756 19" RACK CRADLE

19" Rack Cradle for top mounting in open top rack. Supplied with self-adhesive Velcro to enable small mixers, effects, etc., to be mounted.

- 1.5 mm Steel, black powder coated.
- Depth 38 cm
- Height 2 U
- Weight 0.80 kg



8755# 19" RACK CRADLE EXTRA DEEP

For mounting of non 19" equipment with a depth of up to 375 mm. Rear edge is folded up 10 mm for extra stability. Ventilation slots on both sides.

- 1.6 mm steel, black powder coated

Art. No.	U	Weight
87551	1	2.30 kg
87552	2	2.60 kg
87553	3	2.90 kg



875# 19" RACK CLAMP

For mounting of non 19" equipment. With strong, adjustable clamping steel bars. 1.2 mm Steel, black powder coated.

- Depth: 300 mm

Art. No.	U	Weight
8757	1	2.58 kg
8758	2	2.89 kg
8759	3	3.20 kg




8740#V 19" HOUSING WITH VENTILATION SLOTS

With ventilation slots in top panel, 1.2 mm Steel. Front panel 3 mm Aluminium, black powder coated. Flat-packed with screws.

- Depth: 250 mm

Art. No.	U	Weight
87407V	1	2.25 kg
87408V	2	2.85 kg
87409V	3	3.45 kg

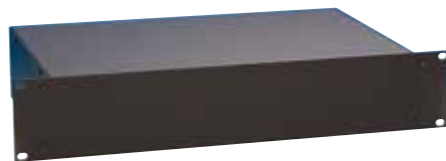

8740# 19" HOUSING

1.2 mm Steel. Front panel 3 mm Aluminium, black powder coated. Flat-packed with screws.

- Depth: 250 mm

Art. No.	U	Weight
87407	1	2.25 kg
87408	2	2.85 kg
87409	3	3.45 kg



8740# LOCKABLE 19" RACKMOUNTING DRAWER MODULE

Lockable 19" rackmounting drawer module. Full extension ball race drawer slide. 1.2 mm steel, black powder coated. Incl. 2 keys. Also available in Aluminium.

Art. No.	U	Depth Outer / Inner	Width Outer / Inner	Height Outer / Inner
87402(A)	1	392 / 383	434 / 401	90 / 74
87403(A)	2	392 / 383	434 / 401	135 / 125
87404(A)	3	392 / 383	434 / 401	180 / 175



8740#E 19" ECONOMY RACKMOUNTING DRAWER MODULE

19" economy rackmounting drawer module. 2/3 extension ball race drawer slides. 1.2 mm steel, black powder coated.

Art. No.	U	Depth Outer / Inner	Width Outer / Inner	Height Outer / Inner
87401E	1	390 / 382	436 / 405	44 / 37
87402E	2	392 / 377	436 / 405	90 / 75
87403E	3	392 / 377	436 / 405	135 / 115



87402T UNIVERSAL PARTITIONING FOR RACK DRAWERS

Universal Partitioning for Rack Drawers 2 U or higher, or any drawer (office, etc.) with a minimum internal height of 70 mm. Black Plastic, supplied in 50cm lengths with click joiners at each end.

Can be easily cut to the required length


- Weight 0.12 kg



87406 19" 6 U RACK DRAWER

Inner tray mounted on fully extendable ball race drawer slides. The drawer is removable. 2.0 mm Steel, black powder coated. Microphone insert not included.

- Weight 13.95 kg

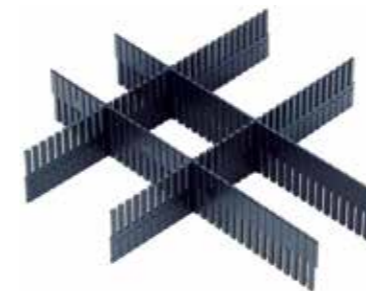

87402P# PARTITIONING FOR ADAM HALL RACK DRAWER

2 U or higher. P1 fits across the width of the drawer, P2 fits along the depth. Use as many as required to create further compartments.

Art. No.	Type	Weight
87402P1	For Width	0.10 kg
87402P2	For Length	0.10 kg



87406MI FOAM MICROPHONE INSERT

Foam microphone insert for use with 87406 drawer.

- Holds up to 25 microphones
- Cross Section Dimension: 56 mm
- Weight 0.44 kg

19" DRAWERS



87556
19" RACKMOUNT PULL-OUT TRAY

1 U, Drawer with slides mounted on both sides with the rack brackets on the front and back are extendable, allowing the unit to be fitted with rear support to racks of varying depths.

- Usable surface 412 mm wide x 380 mm deep
- 1.6 mm steel, black powder coated.
- Weight 5.50 kg



87555
19" RACK-CRADLE

2 U, with pull out shelf on drawer slides with a depth of 358 mm. 1.6 mm steel, black powder coated.

- Weight 5.00 kg



8730#
19" RACKBOX

Steel, black powder coated with black plastic latch. Lid opens downwards.

- Depth 20 cm.

Art. No.	U	Weight
87302	2	4.25 kg
87303	3	5.05 kg



Keyboard not included

87412
19" COMPUTER KEYBOARD TRAY

2U, 19" rackmount for keyboards (tray dimensions 435 x 235 x 70 mm). Includes self adhesive strips to hold keyboard in position.

- Cable access at rear of tray
- Steel, black powder coated
- Depth 36 cm
- Weight 5.70 kg



Monitor not included

87413
19" RACK MOUNT PULL-OUT TRAY

19" Rack mount pull-out tray with folding mounting bracket (VESA 75 mm and 100 mm) for computer screens with a maximum width 435 mm. Velcro straps hold screen securely in place during transport.

- Steel, black powder coated
- Weight 9.00 kg



CDs not included

874331
19" CD SHELF

- 3 U, steel, black powder coated
- Holds 26 CD's
- Weight 1.35 kg



87INLAY
INLAY - NONSLIP DRAWER LINER

Prevents sliding and scratching For rack drawers, shelves etc. Dimensions 400 x 370 mm Perfect for all Adam Hall rack drawers (item nos. 87402, 87402 A, 87403, 87403 A, 87404, 87404 A, 87401E, 87402E, 87403E)

- Weight 0.75 kg



87475
19" HOUSING FOR FUSE SWITCHES

3 U, two part, steel black powder coated

- Weight 1.20 kg
- Cutout 430 x 46 mm

87475A Rear protection box (not depicted above).



SCS19
WALL MOUNT CABLE HOLDER

- Steel material
- 2 mm thickness
- 19 cut outs for cables with diameter from 4 mm - 11 mm
- Dimensions (W x D x H): 318 x 65 x 55 mm



87530
HEADPHONE BRACKET

Mounts over 2 units rack height, swivels flat against rack for transport or can be removed entirely. Also useful for patch cords, etc.

- Steel, black powder coated with soft PVC covering.
- Arm length: 14 cm
- Weight 0.16 kg

MISCELLANEOUS



8722#BRUSH
19" FRONT COVER BRUSH STRIP

To pass through connectors and cables.

Art. No.	U	Opening	Weight
87221BRUSH	1	400 x 21 mm	0.31 kg
87222BRUSH	2	400 x 56 mm	0.43 kg



RACK LIGHTS



87463ULTRAC DUAL GOOSENECK RGB AND WHITE COB LED RACK LIGHT

The 87463 Ultra C is a single space rack light with selectable colors and selection memory. The dual gooseneck lamps are equipped with COB LEDs providing red, green or blue plus cold or warm white illumination and flexible positioning. The 87463 Ultra C is designed for both front or rear mounting and comes with a 12 volt DC power adapter.

- Weight: 0.41 kg



87463ULTRA GOOSENECK COLD WHITE COB LED RACK LIGHT

The 87463 Ultra is a single space dimmable rack light with level memory. The dual gooseneck lamps are equipped with cold white COB LEDs providing 3 levels of illumination and flexible positioning. The 87463 Ultra is designed for both front or rear mounting and comes with a 12 volt DC power adapter.

- Weight: 0.41 kg



87463 LED GOOSENECK RACKLIGHT - 2 GOOSENECKS

- 9" 1 U Dual Gooseneck LED Rack Light
- Dimmer control
- Blue / white switchable
- 4 white and 2 blue LEDs
- Miniature external power supply (12 V)
- Weight: 0.89 kg


RACK LIGHTS



87451PRO LED ARRAY RACK LIGHT WHITE 1 U

This rack light meets the highest professional standards! Equipped with 18 ultra bright LEDs, arranged in an array, this rack light ensures a uniform light distribution over the entire width of the rack. Switching on and off is done via "push-and-hold" on a button. Also, 3 brightness levels can be adjusted with the same button.


- Weight: 0.98 kg

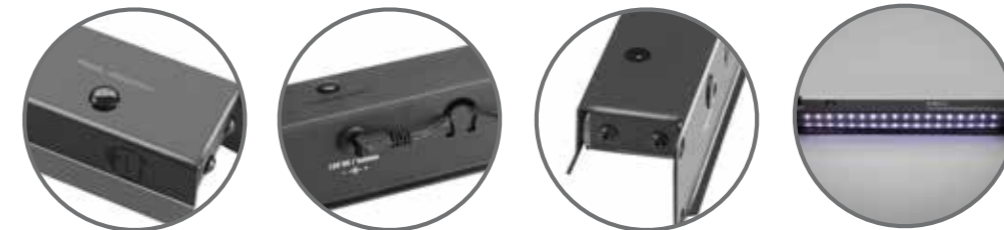

87451PROC LED ARRAY RACK LIGHT MULTI- COLOR 1 U

This rack light meets the highest professional standards! Equipped with 18 ultra bright LEDs, arranged in an array, this rack light ensures a uniform light distribution over the entire width of the rack. Switching on and off is done via "push-and-hold" on a button. Also, 3 brightness levels can be adjusted with the same button.

- Weight: 0.98 kg

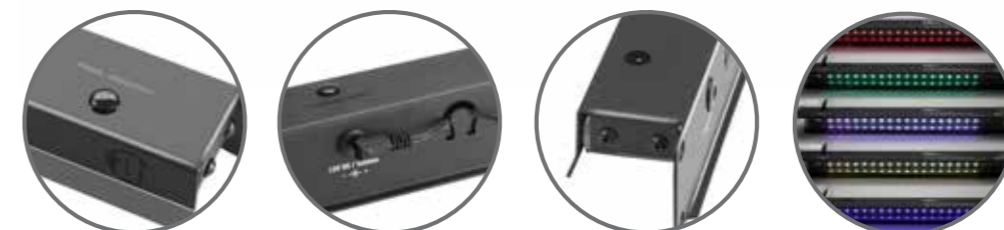

874571### 19" RACKLIGHT "COOL LIGHT"

Uses LED's and Fiberoptic technology to provide subtle rack lighting in several colours.

- 5V adapter included
- Weight 0.42 kg


Art. No. Colour

874571WHI Satin white

874571CHM Multi colour



874571WHI



874571CHM



RACK LIGHTS



SLED1ULTRA### GOOSENECK LIGHT

The SLED 1 ULTRA is a matt black gooseneck light with 4 extra bright white COB LEDs and 3-pin male XLR plug that works on dedicated 12 volt to 48 volt DC. The 300 mm gooseneck is easily flexible yet stays put where you bend it, the power switch is conveniently located on top of the lamp. Weight 0.08 kg.

Model name:	SLED1ULTRABNC	SLED1ULTRAUSB	SLED1ULTRAXLR3	SLED1ULTRAXLR3A	SLED1ULTRAXLR4	SLED1ULTRAXLR4A
Product type:	Gooseneck Lamp	Gooseneck Lamp	Gooseneck Lamp	Gooseneck Lamp	Gooseneck Lamp	Gooseneck Lamp
Number of LEDs	4	4	4	4	4	4
Colour of LEDs	white	white	white	white	white	white
Gooseneck length	300 mm	300 mm	300 mm	400 mm	300 mm	400 mm
Switches	yes	yes	yes	yes	yes	yes
Colour temperature	6000 to 6500 K	6000 to 6500 K	6000 to 6500 K	6000 to 6500K	6000 to 6500 K	6000 to 6500K
Power Supply	via BNC connector	via USB connector	via 3-pin XLR connector	via angled 3-pin XLR connector	via 4-pin XLR connector	via angled 4-pin XLR connector
Weight	0.08 kg	0.08 kg	0.08 kg	0.09 kg	0.08 kg	0.09 kg
Additional information	4 extra bright COB LEDs	4 extra bright COB LEDs	4 extra bright COB LEDs	4 extra bright COB LEDs	4 extra bright COB LEDs	4 extra bright COB LEDs

RACK LIGHTS



SLED1BXL3 SURFACE MOUNT 3-PIN XLR GOOSENECK LIGHT BASE WITH POWER ADAPTER

Made of hard-wearing black plastic with a steel mounting plate the SLED 1 B XLR 3 is a gooseneck light base for lamps with a 3-pin male XLR connector. Pins 1 and 3 are wired to ground, pin 2 supplies +12 volts. The base comes with a 500mA 12 volt DC power adapter.

▪ Weight: 0.12 kg



SLED1BULTRA GOOSENECK LIGHT WITH SUR- FACE MOUNT BASE

Featuring 4 extra bright white COB LEDs, a colour temperature of 6,500 K and convenient power switch the SLED 1 B ULTRA is a 30 cm gooseneck light with rugged surface mount base of black plastic and steel. The lamp includes a 500mA 12 volt DC power adapter.